BÖHMER

OUR EXPERIENCE – YOUR SAFETY

Ball valve with detachable welded ends

Full bore

DN 8-25 | PN 25

KSL

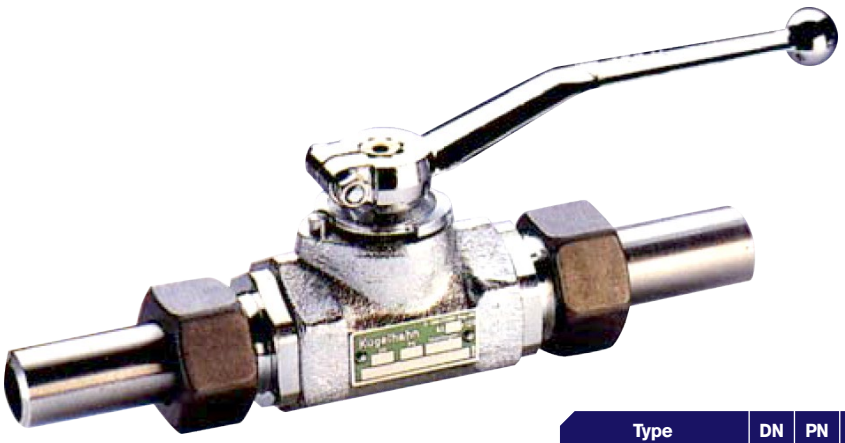

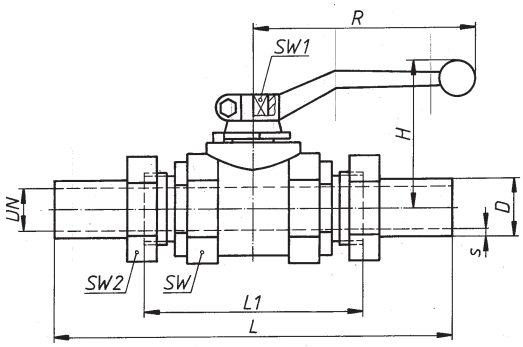

Type of connection	DN	PN	D	s	L	L_1	SW	SW 2	H	R	SW 1	Mass	Order-No.
	mm	bar	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
welded ends DIN 3239 Part 1	8	25	15	2,3	180	74	24	27	44	60	8	0,4	KSL V 025.008
	10	25	17,2	2,3	180	76	30	32	51	90	8	0,6	KSL V 025.010
	12	25	17,2	2,3	200	96	36	32	55	100	10	0,8	KSL V 025.012
	15	25	21,3	2,6	205	102	41	36	68	130	10	0,9	KSL V 025.015
	20	25	26,9	3,2	210	105	46	41	70	130	10	1,2	KSL V 025.020
	25	25	33,7	3,2	225	120	55	50	82	180	12	1,7	KSL V 025.025

Materials	PN	DN	Type 1	Type 2
Body	25	8-25	Steel	Steel
Ball	25	8-25	Brass	Steel, hard chromed
Seals	25	8-25	PTFE	PTFE
O-Rings	25	8-25	NBR	FPM

Please quote order-no. and type:

KSL V 025.XXX / Type (1 o. 2)

- **Also available for district heating applications. Please refer to our district heating and steam catalogue for further information.**
- On request with DIN DVGW acceptance for gas.
- The handle is included
- Special designs upon request.

All details are subject to technical modifications or typing errors | Published 25.04.16