



MODEL 123 BACK PRESSURE / RELIEF REGULATOR



MODEL 123

The Model 123 is a relief regulator suitable as a back pressure regulator or bypass valve for controlling inlet pressure between 2 and 350 psig (.14 to 24.2 Barg) (525 psig (36.2 Barg) at 50% build-up). The body has an angle configuration with a side inlet and a bottom outlet. Sizes are 1/2", 3/4", 1", 1-1/2" and 2" (DN15, 20, 25, 40 and 50). Available options include cryogenic construction, NACE construction and a large selection of trim, body and diaphragm materials. It is the most adaptable back pressure/relief regulator Cashco manufactures.

FEATURES

- | | |
|--|---|
| Versatile: | Five body materials & twenty three trim material combinations allow compatibility with most fluids. |
| Controlled Compression Composition Seats: | Four composition seat materials are available and all use controlled compression with metal to metal back up for long, trouble free life. |
| High Capacity: | A large orifice and diaphragm provide sensitivity with high capacity. |

APPLICATIONS

Designed for controlling a wide range of fluids including air, inert gases, cryogenic gas or liquids, sour gas, chemicals, water, fuel oil and steam. See Table 1 for more information.

CAUTION

This is not a safety device and must not be substituted for a code approved pressure safety relief valve or rupture disc.

STANDARD/GENERAL SPECIFICATIONS

Body Sizes: 1/2", 3/4", 1", 1-1/2" and 2" sizes (DN15, 20, 25, 40 and 50). Includes one side inlet and a bottom outlet, i.e. angle configuration.

End Connections: Standard: NPT female pipe thread.
Alternate: See Opt-30, -31P, -32 or -39 for flanged, extended nipples or socket weld end connections. See Opt -33 for a third body connection.

Body/Spring Chamber Material Combinations: CI/CI, BRZ/CI, BRZ/BRZ, CS/CI, CS/CS, SST/CI, SST/BRZ, SST/CS, SST/SST.
CI – Cast grey iron
BRZ – Cast bronze
CS – Cast carbon steel
SST – Cast stainless steel
All spring chambers furnished with 1/4" (DN8) tapped vent hole. See Table 2 for material specifications.

Operating Temperature: See Tables 2, 3 and 4.

Inlet Pressure: See Tables 2 and 5.

Trim Design: Metal seated or composition seated brass or SST materials. See Figures 1 and 2, and Tables 3 and 4.

Flange Bolting: Standard: Plated Steel
LCC Steel Body material: SST
Cryogenic Construction: SST.

Gaskets: Standard: Graphite/NBR. **NOT SUITABLE FOR OXYGEN SERVICE.**
Alternate Material: See Opt-45, -46G.

Diaphragms: SST, Neoprene (BC), Fluorocarbon Elastomer (FKM), Phosphor Brz., EPDM, TFE Coated SST, Buna-N. (NBR)

Range Springs: Standard: Epoxy coated steel.
LCC Steel Body material : SST
Cryogenic: SST.

Valve Size	Standard Steel Range Spring		Cryogenic SST Range Spring	
	psig	(Barg)	psig	(Barg)
1/2" (DN15)	2 - 30	(.14 - 2.1)	2 - 30	(.14 - 2.1)
	25 - 50	(1.7 - 3.4)	20 - 60	(1.4 - 4.1)
	40 - 100	(2.8 - 6.9)	50 - 110	(3.4 - 7.6)
	80 - 150	(5.5 - 10.3)	90 - 150	(6.2 - 10.3)
	120 - 215	(8.3 - 14.8)	120 - 245	(8.3 - 16.9)
	150 - 350	(10.3 - 24.1)	220 - 300	(15.2 - 20.7)
3/4"-1" (DN20-25)	2 - 20	(.14 - 1.4)	2 - 25	(.14 - 1.7)
	15 - 40	(1.0 - 2.8)	20 - 45	(1.4 - 3.1)
	30 - 80	(2.1 - 5.5)	35 - 100	(2.4 - 6.9)
	65 - 160	(4.5 - 11.0)	80 - 210	(5.5 - 14.5)
	130 - 205	(9.0 - 14.1)	170 - 300	(11.7 - 20.7)
165 - 350	(11.4 - 24.1)			
1-1/2"-2" (DN40-DN50)	2 - 15	(.14 - 1.0)	2 - 15	(.14 - 1.0)
	10 - 25	(.69 - 1.8)	10 - 30	(.69 - 2.1)
	20 - 55	(1.4 - 3.8)	25 - 55	(1.7 - 3.8)
	45 - 105	(3.1 - 7.2)	45 - 95	(3.1 - 6.6)
	85 - 220	(5.9 - 15.1)	75 - 130	(5.2 - 8.7)
	180 - 350	(12.4 - 24.1)	110 - 300	(7.6 - 20.7)

Capacities: Up to 7 C_v; See Tables 6 and 7 for C_v vs. Set pressure. Use for fluids other than water, air or steam, or when the outlet pressure is other than atmospheric pressure.

See Tables 8, 9 and 10 for water, air or saturated steam, respectively.

Capacities are for 10, 20, 30, 40 and 50% build up over the set pressure. The set pressure is made at approximately 2% of the flow capacity shown in the 20% build up columns. The flow rate is different for each size and set pressure. Example: 100 psig (6.9 Barg) set pressure and a 20% build-up = 120 psig (8.3 Barg) flowing pressure for the capacity listed.

Painting: Standard: All non-corrosion resistant portions to be painted with corrosion resistant epoxy paint per Cashco Spec #S-1606.
Alternate: See Opt-95 or -95OS.

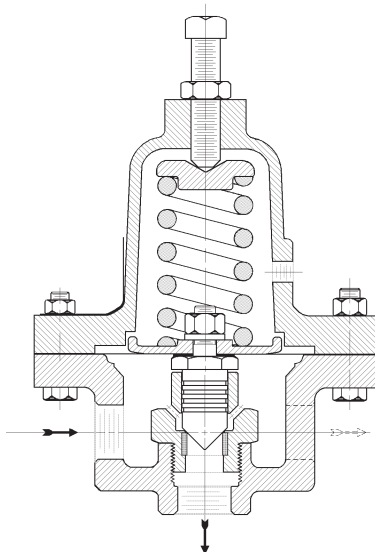


Figure 1: Model 123-33 – Metal Seat Design

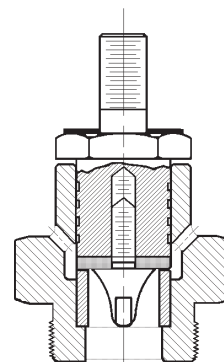


Figure 2: Composition Seat

OPTION SPECIFICATIONS

OPTION-1: CLOSING CAP. Covers the adjusting screw to discourage tampering with the spring setting or for remote venting of the spring chamber. Includes a cast iron or steel spring chamber, a ductile iron closing cap, a gasket for sealing the closing cap to the spring chamber, a sealing lock nut on the adjusting screw and an NPT vent connection in the spring chamber.

OPTION-1+6: DIFFERENTIAL CONSTRUCTION: For differential pressure service. NOT available in body/spring chamber material combinations of BRZ/BRZ, SST/BRZ or SST/SST. Includes closing cap, larger pusher plate, an extra diaphragm gasket (for metal diaphragms), a special grooved adjusting screw, a 1/4" (DN8) NPT female loading pressure connection in spring chamber, and an adjusting screw sealing lock nut. Limited for use on lower range springs indicated below and maximum pressure containment levels indicated in Table 2. (See Model 123-1+6+S Technical Bulletin for alternate design.)

Body Size inches (DN)	Range Spring psid (Bard)
1/2"	2-30, 25-50, 40-100, 80-150
(15)	(.14-2.1, 1.7-3.4, 2.7-6.9, 5.5-10.3)
3/4" & 1"	2-20, 15-40, 30-80, 65-160
(20 & 25)	(.14-1.4, 1.0-2.7, 2.1-5.5, 4.5-11.0)
1-1/2" & 2"	2-15, 10-25, 20-55, 45-105
(40 & 50)	(.14-1.0, .69-1.7, 1.4-3.8, 3.1-7.2)
• Consult factory for sizing and selection of Differential Model 123's. •	

OPTION-5: CRYOGENIC CONSTRUCTION. For cryogenic service. Available in 1/2", 3/4", 1", 1-1/2" and 2" (DN15, 20, 25, 40, and 50) sizes with NPT end connections. Trim B5 is standard with this construction. All other wetted parts are brass. Non-wetted metal parts are of brass or SST to operate at temperatures from -325° to +150°F (-198° to +66°C). The spring chamber has a 1/4" (DN8) NPT vent connection for purge gas and a 1/8" (3.2mm) diameter drain hole. Mount in horizontal piping with adjusting screw below the piping. Cleaned and packaged for oxygen service per Cashco specification #S-1134.

OPTION-15: STELLITED SEAT SURFACES. Stellite faced seating. Available only on 316 SST metal seat with S1 trim. Includes a stellite faced valve seat pressed into the cylinder plus a stellite faced seat cone screwed into the piston. NOT SUITABLE FOR NACE SERVICE.

OPTION-25: TAPPED VENT: 1/8" (DN6) NPT tapped opening in spring chamber for piping vent to remote location, in the event of diaphragm failure.

OPTION-25P: PLASTIC RAIN PROOF BUG VENT. 1/4" NPT(DN8) for spring chamber vent.

OPTION-25S: SST RAIN PROOF BUG VENT. 1/4" NPT(DN8) for spring chamber vent.

OPTION-30: FLANGED END CONNECTIONS. 150# or 300# raised face flanges available on all sizes. Schedule 80 pipe nipples. The raised face flange is welded to the nipple using a socket weld connection. Steel bodies have steel nipples and flanges. 316 SST bodies have 316 SST nipples and flanges. See Tables 2, 3, and 4 for maximum operating temperatures and pressures. With 150# flanges, the flange pressure rating is the pressure limiting factor. For 300# flanges, the body rating is the pressure limiting factor. Standard is two flanges; with Opt-30+33, a third flange is available.

OPTION-31P: BSP END CONNECTIONS. British Standard Parallel Pipe threads per ISO 7/1; used as an alternate to NPT ends.

OPTION-32: EXTENDED P.E. NIPPLES. Schedule 80 plain end pipe nipples used for field butt or socket welding into pipeline. Pipe nipples of same general chemistry as body material. Short threaded pipe nipples seal welded to body. Use for socket weld pipe systems. Available on all sizes of CS and 316 SST bodies.

OPTION-33: THIRD BODY CONNECTION. This option eliminates a pipe tee when the Model 123 is installed in the pump outlet piping. The bottom connection handles the discharge fluid. NPT and Opt -30, -32 and -39 can be furnished on the third body connection.

OPTION-36: SST CRYOGENIC CONSTRUCTION. Same specifications as Opt.-5 except:
 a. For SST/SST body/spring chamber materials with S1 and S36 trim only.
 b. Opt-30 flanged ends available.

OPTION-39: SOCKET WELD END CONNECTIONS. Available on all sizes of CS and 316 SST bodies.

OPTION-40: NACE CONSTRUCTION: Internal wetted portions meet NACE standard MR0175 for application in sour gas service. Exterior of the unit not to be directly exposed to a sour gas environment, buried, insulated or otherwise denied direct atmospheric exposure. CS/CS body/spring chamber materials ONLY. Acceptable ONLY with S40, S40T and S40V trim. (Alternate LCC body/spring chamber material with S40B and S40C only trim.) Opt-30 and -32 require post-weld stress relieving by heat treating.

OPTION-40SST: SST NACE CONSTRUCTION. Same as Opt.-40, except uses SST/SST or SST/CS body/spring chamber construction.

OPTION-45: TFE GASKETS. Primarily for oxygen service. Utilizes TFE/Silicate diaphragm gaskets and closing cap (Opt-1) gaskets. Limits temperature range to -20° to +400°F (-29° to +205°C). Not required when using a composition diaphragm.

Option -46G: HIGH TEMPERATURE GASKETS. CS or SST body/spring chamber materials, S1 or S2 Trim only. Standard diaphragm and pusher plate gasket for units with metal diaphragms replaced with carbon graphite gaskets. Operating temperature -20° to +600° F (-29° to +315°C).

OPTION-55: SPECIAL CLEANING: BRZ or SST body materials only. Cleaning per Cashco Spec. #S-1134 for oxygen service. **NOTE:** Design Pressure Rating shall not exceed 375 psig (25.8 Barg) when body material is SST and process medium is oxygen.

OPTION-56: SPECIAL CLEANING: All body materials. Cleaning per Cashco Spec.#S-1542. Not suitable for oxygen service.

OPTION-95: EPOXY PAINT: Special epoxy painting of all non-corrosion resistant external surfaces per Cashco Spec #S-1547. Utilized in harsh atmospheric conditions.

OPTION-95OS: EPOXY PAINT. Special epoxy painting of all non-corrosion resistant external surfaces per Cashco Spec #S-1687 for OFFSHORE installations.

TECHNICAL SPECIFICATIONS

TABLE 1- Applications		
Fluid	Recommended Construction	Trim Designation Number
Air or Inert Gases	Composition Seat and Diaphragm	B2, B3, B4, BB, S3, S3N, SB
	Metal Seat and Composition Diaphragm	S2N
Chemicals	Metal Seat and Diaphragm	S0, S1, S2
	Metal Seat and Composition Diaphragm	S2N, S5, S40
	Composition Seat and Diaphragm	S3, S3N, SB, S40T, S40V
	Composition Seat and Metal Diaphragm	S9, S36
Sour Gas	Metal Seat and Composition Diaphragm	S40
	Composition Seat and Diaphragm	S40T, S40V
Cryogenic Gas or Liquids	Metal Seat and Diaphragm	S1
	Composition Seat and Metal Diaphragm	B5 or S36
Fuel Oil [‡]	Composition Seat and Diaphragm	BB, B4, B7, S3, S3N, SB
Hydrocarbon Gas or Liquids [‡]	Composition Seat and Diaphragm	BB, B4, B7, S3, S3N, SB
Saturated Steam, Low Pressures up to 50 psig (3.4 Barg)	Metal Seat and Diaphragm	B1, S1, S2
	Composition Seat and Diaphragm	B6
	Composition Seat and Metal Diaphragm	B5, S36
Saturated Steam, Pressures up to 100 psig (6.8 Barg), 50 psid	Metal Seat and Diaphragm	B1, S1, S2
	Composition Seat and Metal Diaphragm	B5, S36
Steam Pressures above 100 psig (6.9 Barg) Saturated or Superheated	Metal Seat and Diaphragm	S1 or S2
Water and Condensate, Low Temperature 32-180°F (0-83°C)	Metal Seat and Composition Diaphragm	S2N
	Composition Seat and Diaphragm	BB, B2, B3, S3, S3N, SB
Water and Condensate, High Temperature 180-300°F (83-149°C)	Metal Seat and Diaphragm	B1, S1, S2
	Composition Seat and Diaphragm	B6

[‡] In accordance with ASME B31.3 "process piping", do not use Cast Iron Body for hydrocarbon or flammable fluid service with inlet pressures greater than 150 psig (10.3 Barg) or temperatures greater than 300° F (149° C).

**TABLE 2
BODY AND SPRING CHAMBER
MAXIMUM PRESSURE WITH TEMPERATURE RATINGS**

Material Specifications (Body / Spring Chamber)		Inlet			
Description (Abbr.)	ASTM No.	Pressure		Temperature	
		psig	(barg)	°F	(°C)
CI/CI	A126, Class B	300 ** 250	(20.7) (17.2)	-20 to +400 -20 to +450	(-29 to +205) (-29 to +232)
BRZ/CI	B62 Alloy C83600/ A126, Class B	300 **	(20.7)	-20 to +350	(-29 to +177)
BRZ/BRZ *	B62, Alloy C83600	400 300 250	(27.6) (20.7) (17.2)	-20 to +200 -20 to +350 -20 to +400	(-29 to +93) (-29 to +177) (-29 to +205)
CS/CI	A216, Gr. WCB/ A126, Class B	300 ** 250	(20.7) (17.2)	-20 to +400 -20 to +450	(-29 to +205) (-29 to +232)
CS/CS ***	A216, Gr. WCB/ A216, Gr. WCB	525	(36.1)	-20 to +450	(-29 to +232)
SST/CI	A351, Gr. CF8M/ A126, Class B	300 ** 250	(20.7) (17.2)	-20 to +400 -20 to +450	(-29 to +205) (-29 to +232)
SST/BRZ	A351, Gr. CF8M/ B62, Alloy C83600	400 300 250	(27.6) (20.7) (17.2)	-20 to +200 -20 to +350 -20 to +400	(-29 to +93) (-29 to +177) (-29 to +205)
SST/CS	A351, Gr. CF8M/ A216, Gr. WCB	525	(36.1)	-20 to +450	(-29 to +232)
SST/SST *	A351, Gr. CF8M/ A351, Gr. CF8M				

* For operating temperatures between -325 to +150F (-198 to +66°C), specify Opt -5 with trim B5 or Opt-36 with trim S1 or S36.

** For Opt-1+6 with Cast Iron Spring Chamber - Max. Inlet Pressure Rating is de-rated to 250 psig (17.2 Barg).

*** Alternate "CS" material - LCC -Steel - ASTM A352 Gr. LCC - minimum temperature -50 °F (-46 °C) with S1 or S36 Trim.

**TABLE 3
BRASS TRIM MATERIAL COMBINATIONS**

Brass Trim Designations								
Part	Metal Seat	Composition Seat						
	B1	B2	B3	B4	*B5	B6	B7	BB
Diaphragm	302 SST	BC	BC	FKM	Phosphor Brz	EPDM	FKM	NBR
Cylinder	Brass	Brass	Brass	Brass	Brass	Brass	Brass	Brass
Valve Seat	316 SST	Brass	Brass	Brass	Brass	Brass	Brass	Brass
Plug	416 SST	Brass	Brass	Brass	Brass	Brass	Brass	Brass
Seat Disc	None (metal)	NBR	TFE	TFE	TFE	EPR	FKM	NBR
Seat Disc Screw	None	Brass	Brass	Brass	Brass	Brass	Brass	Brass
Temperature °F (°C)	-20 to +400 (-29 to 205)	-20 to +180 (-29 to +83)	-20 to 180 (-29 to +83)	-20 to +300 (-29 to 205)	-20 to +200 (-29 to +93)	-20 to +300 (-29 to +149)	-20 to +300 (-29 to 149)	-20 to +180 (-29 to +83)

* For operating temperatures between -325° and +150°F (-198 and +66°C), specify Opt-5 and trim designation B5.

BC = Neoprene; NBR = Buna-N; FKM = Fluorocarbon elastomer; EPR = Ethylene Propylene; EPDM = Ethylene Propylene Diene; TFE = Polytetrafluoroethylene

TABLE 4 (a)
STAINLESS STEEL TRIM MATERIAL COMBINATIONS – METAL SEAT

Stainless Steel Trim Designations - Metal Seat							
Part	S0	*S1	S2	S2N	S5	S40 (NACE)	S40B (NACE)
Diaphragm	TFE Coated 302SST	302SST	302SST	BC	FKM	BC	BC **
Cylinder	316SST	316SST	316SST	316SST	316SST	316SST	316SST
Valve Seat	316SST	316SST	316SST	316SST	316SST	316SST	316SST
Plug	316SST	316SST	416SST	416SST	416SST	316SST	316SST
Seat Disc	None (metal)	None (metal)	None (metal)	None (metal)	None (metal)	None (metal)	None (metal)
Seat Disc Screw	None	None	None	None	None	None	None
Temperature °F (°C)	-20 to +450 (-29 to +232)			-20 to +180 (-29 to +83)	-20 to +300 (-29 to +149)	-20 to +180 (-29 to +83)	-50 to +200 (-46 to +93)

* Available with stellited plug and valve seat (see Opt-15). Includes a screwed in seat cone.
 *For Operating temperatures between -325° and +150°F (-198 and +66°C), specify Opt-36, S1trim.
 ** Special BC Material for Low Temperature.

TABLE 4 (b)
STAINLESS STEEL TRIM MATERIAL COMBINATIONS – COMPOSITION SEAT

Stainless Steel Trim Designations - Composition Seat								
Part	S3	S3N	S9	*S36	S40T (NACE)	S40V (NACE)	S40C (NACE)	SB
Diaphragm	BC	BC	TFE Coated 302SST	302SST	FKM	FKM	BC **	NBR
Cylinder	316SST	316SST	316SST	316SST	316SST	316SST	316SST	316SST
Valve Seat	316SST	316SST	316SST	316SST	316SST	316SST	316SST	316SST
Plug	316SST	316SST	316SST	316SST	316SST	316SST	316SST	316SST
Seat Disc	TFE	NBR	TFE	TFE	TFE	FKM	TFE	NBR
Seat Disc Screw	316SST	316SST	316SST	316SST	316SST	316SST	316SST	316SST
Temperature °F (°C)	-20 to +180 (-29 to +83)		-20 to +400 (-29 to +205)		-20 to +300 (-29 to +149)		-50 to +200 (-46 to +93)	-20 to +180 (-29 to +83)

* For operating temperatures between -325° and +150°F (-198 and +66°C), specify Opt-36, S36 trim.
 ** Special BC Material for Low Temperature.

BC = Neoprene; NBR = Buna-N; FKM = Fluorocarbon elastomer; EPDM = Ethylene Propylene-Diene; EPR = Ethylene Propylene; TFE = Polytetrafluoroethylene

TABLE 5
MAXIMUM ALLOWABLE PRESSURE DROPS

Fluid	Pressure Drop ¹		Seat Material	Trim Material	Trim Designation No.
	psid	(Bard)			
Liquid	350	(24.14)	Stellite	SST	S1
	350	(24.14)	Comp	SST	S9 or S36
	350	(24.14)	Comp	SST - COMP	S3, S3N, SB, S40T,V or C
	250	(17.25)	Metal	BR	B1
	250	(17.25)	Comp	BR - Comp	B2, B3, B4, B6, B7 or BB
Gases	350	(24.14)	Metal	BR or SST	B1, S0, S1 or S2
			Metal	SST - Comp	S2N, S5 or S40 or S40B
			Comp	SST	S9 or S36
			Comp	SST -Comp	S3, S3N, SB,S40T,V or C
			Comp	BR - Comp	B2, B3, B4, B6, B7 or BB
Steam	350	(24.14)	Stellite	SST	S1
	300	(20.7)	Metal	SST	S1 or S2
	200	(13.8)	Metal	BR	B1
	50	(3.45)	Comp	BR - Comp	B6

¹ Maximum pressure drops are with the plug on the seat; i.e. no flow

**TABLE 6
CAPACITY TABLES - Cv — METAL DIAPHRAGM**

Set Point (Inlet) Pressure P ₁		1/2" (DN15) Body					3/4" (DN20) Body					1" (DN25) Body					1-1/2" (DN40) Body					2" (DN50) Body				
		% Build					% Build					% Build					% Build					% Build				
psig	(Barg)	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%
5	(.34)	0.22	0.44	0.67	0.89	1.11	0.50	1.00	1.44	1.77	2.05	0.50	1.00	1.44	1.77	2.05	1.50	2.89	3.57	3.92	4.28	1.74	3.32	4.11	4.59	4.90
10	(.69)	0.37	0.76	1.14	1.52	1.90	0.72	1.45	2.05	2.56	3.07	0.72	1.45	2.05	2.56	3.07	1.55	2.94	3.84	4.38	4.40	1.78	3.36	4.47	5.10	5.15
15	(1.0)	0.41	0.84	1.26	1.67	2.09	0.80	1.64	2.38	2.95	3.54	0.80	1.64	2.38	2.95	3.54	1.60	3.02	4.00	4.40	4.40	1.81	3.44	4.66	5.15	5.15
25	(1.7)	0.49	0.98	1.50	2.00	2.14	0.77	1.57	2.31	2.84	3.34	0.77	1.57	2.31	2.84	3.34	1.71	3.18	4.21	4.40	4.40	1.94	3.62	4.90	5.15	5.15
35	(2.4)	0.54	1.09	1.63	2.14	2.14	0.80	1.79	2.61	3.18	3.78	0.80	1.79	2.61	3.18	3.78	0.93	1.78	2.70	3.48	4.20	1.04	2.10	2.85	4.10	4.93
50	(3.4)	0.67	1.32	1.98	2.14	2.14	0.72	1.43	2.15	2.84	3.38	0.72	1.43	2.15	2.84	3.38	1.15	2.25	3.36	4.28	4.40	1.33	2.62	3.95	5.00	5.15
75	(5.2)	0.59	1.19	1.78	2.14	2.14	1.07	2.15	3.04	3.38	3.38	1.07	2.15	3.04	3.38	3.38	1.28	2.44	3.56	4.40	4.40	1.42	2.80	4.17	5.15	5.15
100	(6.9)	0.74	1.45	2.14	2.14	2.14	0.69	1.25	1.88	2.52	3.38	0.69	1.25	1.88	2.52	3.38	1.40	2.65	3.83	4.40	4.40	1.56	3.05	4.47	5.15	5.15
150	(10.3)	0.59	1.19	1.78	2.14	2.14	0.88	1.76	2.66	3.38	3.10	0.88	1.76	2.66	3.38	3.10	1.28	2.52	3.64	4.40	4.40	1.48	2.90	4.14	5.15	5.15
200	(13.8)	0.74	1.45	2.14	2.14	2.14	0.98	1.90	2.81	3.38	3.38	0.98	1.90	2.81	3.38	3.38	1.69	3.26	4.40	4.40	4.40	1.95	3.2	5.15	5.15	5.15
300	(20.7)	0.81	1.62	2.14	2.14	2.14	1.11	2.15	3.33	3.38	3.38	1.11	2.15	3.33	3.38	3.38	1.62	3.14	4.40	4.40	4.40	1.77	3.61	5.15	5.15	5.15
350	(24.1)	0.85	1.70	2.14	2.14	2.14	1.27	2.55	3.38	3.38	3.38	1.27	2.55	3.38	3.38	3.38	1.80	3.50	4.40	4.40	4.40	2.08	4.00	5.15	5.15	5.15

Metric Conversion Factor: Cv / 1.16 = kv

**TABLE 7
CAPACITY TABLES - Cv — COMPOSITION DIAPHRAGM**

Set Point (Inlet) Pressure P ₁		1/2" (DN15) Body					3/4" (DN20) Body					1" (DN25) Body					1-1/2" (DN40) Body					2" (DN50) Body				
		% Build					% Build					% Build					% Build					% Build				
psig	(Barg)	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%
5	(.34)	0.37	0.73	1.12	1.48	1.85	0.83	1.67	2.40	2.95	3.42	0.83	1.67	2.40	2.95	3.42	2.50	4.82	5.95	6.53	6.70	2.90	5.53	6.85	7.00	7.00
10	(.69)	0.62	1.27	1.90	2.53	3.04	1.20	2.42	3.42	4.27	5.10	1.20	2.42	3.42	4.27	5.10	2.58	4.90	6.40	6.70	6.70	2.97	5.60	7.00	7.00	7.00
15	(1.0)	0.68	1.40	2.10	2.78	3.04	1.33	2.73	3.97	4.92	5.10	1.33	2.73	3.97	4.92	5.10	2.67	5.00	6.67	6.70	6.70	3.02	5.73	7.00	7.00	7.00
25	(1.7)	0.82	1.63	2.50	3.04	3.04	1.28	2.62	3.85	4.73	5.10	1.28	2.62	3.85	4.73	5.10	2.85	5.30	6.70	6.70	6.70	3.23	6.03	7.00	7.00	7.00
35	(2.4)	0.90	1.82	2.72	3.04	3.04	1.33	2.98	4.35	5.10	5.10	1.33	2.98	4.35	5.10	5.10	1.55	2.97	4.50	5.80	6.70	1.73	3.50	4.75	7.00	7.00
50	(3.4)	1.12	2.20	3.04	3.04	3.04	1.20	2.38	3.58	4.73	5.10	1.20	2.38	3.58	4.73	5.10	1.92	3.75	5.60	6.70	6.70	2.22	4.37	6.58	7.00	7.00
75	(5.2)	0.98	1.98	2.97	3.04	3.04	1.78	3.58	5.07	5.10	5.10	1.78	3.58	5.07	5.10	5.10	2.13	4.07	5.93	6.70	6.70	2.37	4.67	6.95	7.00	7.00
100	(6.9)	1.23	2.42	3.04	3.04	3.04	0.99	1.79	2.69	3.60	4.43	0.99	1.79	2.69	3.60	4.43	2.00	3.79	5.47	6.70	6.70	2.23	4.36	6.39	7.00	7.00
150	(10.3)	0.84	1.70	2.54	3.04	3.04	1.26	2.51	3.80	4.96	5.10	1.26	2.51	3.80	4.96	5.10	1.83	3.60	5.20	5.63	6.70	2.11	4.14	5.91	7.00	7.00
200	(13.8)	1.06	2.07	3.04	3.04	3.04	1.40	2.71	4.01	5.10	5.10	1.40	2.71	4.01	5.10	5.10	2.41	4.66	6.47	6.70	6.70	2.79	5.31	7.00	7.00	7.00
300	(20.7)	1.16	2.31	3.04	3.04	3.04	1.59	3.07	4.75	5.10	5.10	1.59	3.07	4.75	5.10	5.10	2.31	4.49	6.36	6.70	6.70	2.53	5.16	7.00	7.00	7.00
350	(24.1)	1.21	2.43	3.04	3.04	3.04	1.81	3.64	5.10	5.10	5.10	1.81	3.64	5.10	5.10	5.10	2.57	5.00	6.70	6.70	6.70	2.97	5.71	7.00	7.00	7.00


Metric Conversion Factor: Cv / 1.16 = kv

TABLE 9
AIR CAPACITY - SCFH S.G. = 1.0 T = 60°F F_L = 0.945

All Sizes - COMPOSITION DIAPHRAGM ONLY

Outlet Pressure (psig)	1/2" (DN15) Body										3/4" (DN20) Body										1" (DN25) Body										1-1/2" (DN40) Body										2" (DN50) Body									
	% Build					% Build					% Build					% Build					% Build					% Build					% Build					% Build					% Build									
	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%	10%	20%	30%	40%	50%															
5	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC										
	570	540	850	1140	1460	600	1230	1810	2280	2710	600	1230	1810	2280	2710	1800	3560	4490	5050	5300	1800	3560	4490	5050	5300	4900	6660	7590	8150	8400	4900	6660	7590	8150	8400	10600	14000	17400	21700	25100										
	570	1210	1880	2590	3220	1100	2300	3380	4370	5400	1100	2300	3380	4370	5400	2360	4660	6320	7090	7270	2360	4660	6320	7090	7270	5050	9350	12750	16150	19550	5050	9350	12750	16150	19550	11200	15000	18800	22600	26400										
	10	570	1630	2560	3540	1480	3180	4840	6260	7690	1480	3180	4840	6260	7690	2970	5830	8130	8880	9360	2970	5830	8130	8880	9360	6320	11220	15020	18820	22620	6320	11220	15020	18820	22620	13120	17920	21720	25520	29320										
	15	760	2600	4210	5380	5660	1930	4170	6480	8380	9490	1930	4170	6480	8380	9490	4290	8440	11270	12460	13650	4290	8440	11270	12460	13650	9660	17160	22960	28760	34560	9660	17160	22960	28760	34560	19560	26060	32560	39060	45560									
	25	1710	3680	5840	6900	7280	2520	6020	9330	11580	12220	2520	6020	9330	11580	12220	2940	6000	9660	13170	16050	2940	6000	9660	13170	16050	6000	11200	14800	18400	22000	6000	11200	14800	18400	22000	12400	17600	22800	28000	33200									
	35	2780	5860	8840	9180	9720	2980	6340	10170	14280	16310	2980	6340	10170	14280	16310	4770	9990	15910	20230	24340	4770	9990	15910	20230	24340	9990	17910	23910	29910	35910	9990	17910	23910	29910	35910	19910	27910	35910	43910	51910									
	50	3400	7390	SONIC	SONIC	SONIC	6170	13370	SONIC	SONIC	SONIC	6170	13370	SONIC	SONIC	SONIC	7380	15190	23720	28600	30390	7380	15190	23720	28600	30390	15190	28230	36970	45710	54450	15190	28230	36970	45710	54450	31190	42330	53470	64610	75750									
	75	5470	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	11730	25010	38900	48260	52350	11730	25010	38900	48260	52350	25010	43350	57240	71130	85020	25010	43350	57240	71130	85020	51130	69470	87810	106150	124490									
	100	5990	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	11730	25010	38900	48260	52350	11730	25010	38900	48260	52350	25010	43350	57240	71130	85020	25010	43350	57240	71130	85020	51130	69470	87810	106150	124490									
150	8880	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	31120	39060	47000	54940	62880										
200	8880	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	31120	39060	47000	54940	62880										
300	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC										
350	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC										
5	250	510	790	1070	1370	560	1160	1700	2140	2540	560	1160	1700	2140	2540	1690	3330	4220	4740	4970	1690	3330	4220	4740	4970	3330	6000	7830	9660	11490	3330	6000	7830	9660	11490	6660	12330	16000	21670	27340										
10	570	1210	1870	2580	3210	1100	2300	3370	4360	5390	1100	2300	3370	4360	5390	2360	4660	6320	7090	7270	2360	4660	6320	7090	7270	4900	9350	12750	16150	19550	4900	9350	12750	16150	19550	9800	18700	25500	33400	41300										
15	760	1630	2560	3540	4030	1480	3180	4840	6260	6760	1480	3180	4840	6260	6760	2970	5830	8130	8880	9360	2970	5830	8130	8880	9360	6320	11220	15020	18820	22620	6320	11220	15020	18820	22620	12640	17540	22440	27340	32240										
25	1710	3680	5840	6900	7280	2520	6020	9330	11580	12220	2520	6020	9330	11580	12220	2940	6000	9660	13170	16050	2940	6000	9660	13170	16050	6000	11200	14800	18400	22000	6000	11200	14800	18400	22000	12400	17600	22800	28000	33200										
35	2780	5860	8840	9180	9720	2980	6340	10170	14280	16310	2980	6340	10170	14280	16310	4770	9990	15910	20230	24340	4770	9990	15910	20230	24340	9990	17910	23910	29910	35910	9990	17910	23910	29910	35910	19910	27910	35910	43910	51910										
50	3400	7390	SONIC	SONIC	SONIC	6170	13370	SONIC	SONIC	SONIC	6170	13370	SONIC	SONIC	SONIC	7380	15190	23720	28600	30390	7380	15190	23720	28600	30390	15190	28230	36970	45710	54450	15190	28230	36970	45710	54450	31190	42330	53470	64610	75750										
75	5470	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	11730	25010	38900	48260	52350	11730	25010	38900	48260	52350	25010	43350	57240	71130	85020	25010	43350	57240	71130	85020	51130	69470	87810	106150	124490										
100	5990	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	8080	SONIC	SONIC	SONIC	SONIC	11730	25010	38900	48260	52350	11730	25010	38900	48260	52350	25010	43350	57240	71130	85020	25010	43350	57240	71130	85020	51130	69470	87810	106150	124490										
150	8880	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	31120	39060	47000	54940	62880										
200	8880	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	19560	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	28420	SONIC	SONIC	SONIC	SONIC	31120	39060	47000	54940	62880										
300	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC										
350	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC	SONIC										
5	250	510	790	1070	1370	560	1160	1700	2140	2540	560	1160	1700	2140	2540	1690	3330	4220	4740	4970	1690	3330	4220	4740	4970	3330	6000	7830	9660	11490	3330	6000	7830	9660	11490	6660	12330	16000	21670	27340										
10	570	1210	1870	2580	3210	1100	2300	3370	4360	5390	1100	2300	3370	4360	5390	2360	4660	6320	7090	7270	2360	4660	6320	7090	7270	4900	9350	12750	16150	19550	4900	9350	12750	16150	19550	9800	18700	25500	33400	41300										
15	760	1630	2560	3540	4030	1480	3180	4840	6260	6760	1480	3180	4840	6260	6760	2970	5830	8130	8880	9360	2970	5830	8130	8880	9360	6320	11220	15020	18820	22620	6320	11220	15020	18820	22620	12640	17540	22440	27340	32240										
25	1710	3680	5840	6900	7280	2520	6020	9330	11580	12220	2520	6020	9330	11580	12220	2940	6000	9660	13170	16050	2940	6000	9660	13170	16050	6000	11200	14800	18400	22000	6000	11200	14800	18400	22000	12400	17600	22800	28000	33200										
35	2780	5860	8840	9180	9720	2980	6340	10170	14280	16310	2980	6340	10170	14280	16310	4770	9990	15910	20230	24340	4770	9990	15910	20230	24340	9990	17910	23910	29910	35910	9990	17910	23910	29910	35910	19910	27910	35910	43910	51910										
50	3400	7390	SONIC	SONIC	SONIC	6170	13370	SONIC	SONIC	SONIC	6170	13370	SONIC	SONIC	SONIC	7380	15190	23																																

DIMENSIONS AND WEIGHTS

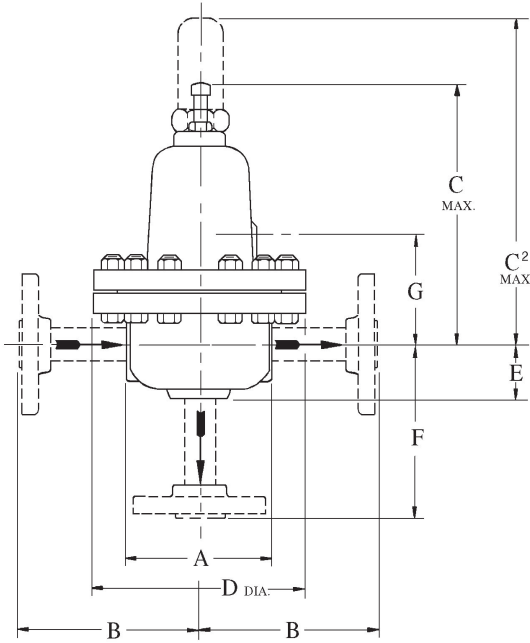

Regulator Size (inch)	ENGLISH (in)										Shipping Weight lbs. ⁴
	A	B	B ¹	C	C ²	D	E	F	F ³	G	
1/2	4.32	5.16	8.16	9.00	9.59	6.00	1.88	4.88	7.88	2.50	20
3/4	5.00	6.19	8.50	9.75	10.28	7.38	1.75	5.56	7.75	3.50	30
1	5.00	6.19	8.50	9.75	10.28	7.38	1.75	5.56	7.75	3.50	30
1-1/2	6.24	6.88	9.12	9.87	10.78	8.50	2.19	5.94	8.19	3.88	38
2	6.00	7.19	9.00	9.75	10.85	8.50	2.19	6.38	8.19	4.31	48

Regulator Size DN	METRIC (mm)										Shipping Weight kgs. ⁴
	A	B	B ¹	C	C ²	D	E	F	F ³	G	
15	110	131	207	229	243	152	48	124	200	63	9.1
20	128	157	216	248	261	187	44	141	197	89	13.6
25	128	157	216	248	261	187	44	141	197	89	13.6
40	158	175	232	250	273	216	56	151	208	98	17.2
50	152	183	229	247	275	216	56	162	208	109	21.2

- ¹ CL of body to extended P.E. nipple (not shown), Opt-32
- ² CL of body to top of Closing Cap, Opt-1
- ³ CL of body to end of extended P.E. nipple (not shown), Opt.-32
- ⁴ Weights do not include flanges.

Cryogenic OPT-5 or -36 BRZ or SST Body Mat'l OR For LCC Body Mat'l to -50°F(-46°C)

An "X" in POS 12 followed by a 5-digit control number overrides remaining selections.



POSITION 3 - SIZE		
Size	(DN)	CODE
1/2"	(15)	4
3/4"	(20)	5
1"	(25)	6
1-1/2"	(40)	8
2"	(50)	9

POSITION 5 - BODY & SPRING CHAMBER MATERIALS		
Body/Sp.Ch.	Option	CODE
BRZ/BRZ	-5 *	3
SST/SST	-36 *	A
CS/CS (LCC)	**	D

* Cleaned per Spec #S-1134 (Opt. -55).
** Minimum temperature -50 °F (-46 °C).

POSITION 6 & 7 - TRIM DESIGNATION NO.			
Brass Trim (For Brass Body)		Stainless Steel Trim (For SST & LCC Body)	
Desig.	CODE	Desig.	CODE
B5	B5	S1	S1
		S36	36
		S40B *	4B
		S40C *	4C

* NACE Trim use w/ CS Body down to -50° F (-46° C).

POSITION 8 - Product Classification Under European "Pressure Equipment Directive"		
PRODUCT DESTINATION	HAZARD CATEGORY	CODE
Anywhere except Europe	N/A	7
European Countries * (CE Mark does not apply to DN25 and below)	Sound Engineering Practice (SEP)	S
	CE Marked Hazard Cat I or II	E
	ATEX	A

* For products to be placed in service in Europe - Ref to Directive 2014/68/EU. Forward Completed "EU" Application Recorder prior to quotation. (Without Recorder- Processing of Purchase Order will be delayed). Contact Cashco for Assistance.

POSITION 10 - END CONNECTIONS	
Description	CODE
NPT Screwed	1
OPT-30 - 150 LB RF Flg * (2)	6
OPT-30 - 300 LB RF Flg * (2)	7

* SST or LCC Body Material ONLY. (Nipples & Flanges same Material as Body)

POSITION 11 - RANGE SPRING			
SST Range Spring			
Size	Range		CODE
	psig	(Barg)	
1/2" (DN15)	2-30	(.14-2.1)	3
	20-60	(1.4-4.1)	6
	50-110	(3.4-7.6)	A
	90-150	(6.2-10.3)	C
	120-245	(8.3-16.9)	E
	220-300	(15.2-20.7)	H
3/4" & 1" (DN20) (DN25)	2-25	(.14-1.7)	2
	20-45	(1.4-3.1)	5
	35-100	(2.4-6.9)	9
	80-210	(5.5-14.5)	D
	170-300	(11.7-20.7)	G
1 1/2" & 2" (DN40) (DN50)	2-15	(.14-1.0)	1
	10-30	(.69-2.1)	4
	25-55	(1.7-3.8)	7
	45-95	(3.1-6.6)	8
	75-130	(5.2-9.0)	B
	110-300	(7.6-20.6)	F

POSITION 12 - TRIM OPTIONS		
Description	Option	CODE
No Option	—	0
For Special Construction Contact Cashco for Special Product Code.	SPQ	X

POSITION 16 - CERTIFICATE OPTIONS		
Description	Option	CODE
No Option	—	0
NACE Const: CS/CS/XX Per MR0175, S40B, S40C *	-40	J

* Not Available for OPT-5 or -36.

MODEL 123 Basic & Differential PRODUCT CODER 02/19/16

An "X" in POS 12 followed by a 5-digit control number overrides remaining selections.



POSITION 1 - MODEL	
CODE	Description
8	MODEL "123" BACK PRESSURE RELIEF
9	MODEL "123-1+6" Differential BACK PRESS. W/ CLOSING CAP

POSITION 2 - GASKETS * & SERVICE		
Gasket - Service	Options	CODE
Standard: Graphite/NBR - Non-Oxygen	--	B
TFE - Primarily for Oxygen	-45 **	D
Carbon graphite - High Temperature	-46G ***	G

* Refer to Tech bulletin for temperature limits.
 ** Not available with Option -1+6. Comp. Diaphragm does not require gaskets.
 *** Only Available with CS(WCB) or SST Body & Sprng Chamber, S1 or S2 Trim.

POSITION 3 - SIZES		
Size		CODE
inch	(DN)	
1/2"	(15)	4
3/4"	(20)	5
1"	(25)	6
1-1/2"	(40)	8
2"	(50)	9

POSITION 5 - BODY & SPRING CHAMBER MATERIALS	
Body/Sp. Ch.	CODE
CI/CI	1
BRZ/CI	2
BRZ/BRZ *	3
CS/CI	4
CS/CS (WCB)	5
SST/CI	7
SST/BRZ *	8
SST/CS	9
SST/SST *	A

* Not available w/ 1+6 variation.

POSITION 6 & 7 - TRIM DESIGNATION NUMBERS				
Brass Trim			Stainless Steel Trim	
Desig.	Body Material		Desig.	Body Mat'l
	CI OR BRZ CODE	CS CODE		
B1	B1	B1	S0	S0
B2	B2	B2	S1	S1
B3	B3	--	S2	S2
B4	B4	--	S2N	SN
B5	B5	--	S3	S3
B6	B6	--	S3N	SC
B7	B7	--	S5	S5
BB	BB	BB	S9	S9
			S36	36
			S40	40
			S40T	4T
			S40V	4V
			SB	SB

POSITION 8 - Product Classification Under European "Pressure Equipment Directive"		
PRODUCT DESTINATION	HAZARD CATEGORY	CODE
Anywhere except Europe	N/A	7
European Countries * (CE Mark does not apply to DN25 and below)	Sound Engineering Practice (SEP)	S
	CE Marked Hazard Cat I or II	E
	ATEX	A

* For products to be placed in service in Europe - Ref to Directive 2014/68/EU. Forward Completed "EU" Application Recorder prior to quotation. (Without Recorder- Processing of Purchase Order will be delayed). Contact Cashco for Assistance.

POSITION 10 - END CONNECTIONS	
Description	CODE
NPT Screwed	1
OPT-30 - 150 LB RF Flgs (2) *	6
OPT-30 - 300 LB RF Flgs (2) *	7
OPT-31P - BSPP Screwed Parallel Pipe Thread	P
OPT-32 - SCH. 80 PE EXT. Nipples (2) *	E
OPT-33 - Third Body CONN (NPT)	4
OPT-39 - Socket Weld (2 CONN)	2
OPT-30 +33 - 150 LB RF Flgs (3 CONN) *	C
OPT-30 +33 - 300 LB RF Flgs (3 CONN) *	D
OPT-32 +33 - SCH. 80 PE EXT. Nipples(3 CONN) *	F
OPT-39 +33 - Socket Weld (3 CONN)	G

* Nipples & Flanges of same material as body. Flanges not available with CI body.

POSITION 11 - RANGE SPRINGS			
Range Spring - STD & "1+6" Option			
SIZE	Range		CODE
	psig	(Bar)	
1/2" (DN15)	2-30 *	(.14-2.1)	3
	25-50 *	(1.7-3.4)	6
	40-100 *	(2.8-6.9)	9
	80-150 *	(5.5-10.3)	C
	120-215	(8.3-14.8)	F
3/4" & 1" (DN20) (DN25)	150-350 **	(10.3-24.1)	G
	2-20 *	(.14-1.4)	2
	15-40 *	(1.0-2.8)	5
	30-80 *	(2.1-5.5)	8
	65-160 *	(4.5-11.0)	B
1-1/2" & 2" (DN40) (DN50)	130-205	(9.0-14.1)	E
	165-350 **	(11.4-24.1)	H
	2-15 *	(.14-1.0)	1
	10-25 *	(.69-1.7)	4
	20-55 *	(1.4-3.8)	7
	45-105 *	(3.1-7.2)	A
	85-220	(5.9-15.1)	D
	180-350 **	(12.4-24.1)	J

* Range springs for use with Opt-1+6.
 ** Not available for any body-spring chamber material combinations with CI. Must select BRZ, CS or SST spring chamber material from Position 5.

POSITION 12 - TRIM OPTIONS		
Description	Option	CODE
No Option	--	0
Stellited Seat Surface - S1 Trim Only.	-15	A
For Special Construction Contact Cashco for Special Product Code.	SPQ	X

POSITION 13 - FEATURE OPTIONS		
Description	Option	CODE
No Option	--	0
DI Closing Cap CI or CS Spring Chamber. (Included with "1+6" Variation).	-1	1

POSITION 14 - SPRING CHAMBER OPTIONS		
Description	Option	CODE
No Option	--	0
1/8" (DN6) NPT Vent Tap for CI, CS, SST Mat'l's.	-25	D
Plastic Rain-proof Bug Vent.	-25P	P
SST Rain-proof Bug Vent.	-25S	H

POSITION 16 - CERTIFICATE OPTIONS		
Description	Option	CODE
No Option	--	0
NACE Construction: CS/CS/XX Per MR0175, S40, S40T, or S40V Trims (NOT Available with "1+6" Variation).	-40	J
NACE Construction: SS/SS/XX OR SS/CS/XX Per MR0175, S40, S40T, or S40V Trims. (NOT Available with "1+6" Variation).	-40SST	K
Special Cleaning: Per Cashco Spec #S-1134. BRZ or SST body/sp.ch. mat'l's only. Suitable for oxygen service. (Not Available w/ "1+6" Variation).	-55	M
Special Cleaning: Per Cashco Spec #S-1542.	-56	N

POSITION 17 - PAINT OPTIONS		
Description	Option	CODE
No Option	--	0
Epoxy Painted Per Cashco Spec #S-1547.	-95	W
Epoxy Painted Per Cashco Spec #S-1687 OFFSHORE Applic.	-95OS	Y

Cashco, Inc.
 P.O. Box 6
 Ellsworth, KS 67439-0006
 PH (785) 472-4461
 Fax. # (785) 472-3539
 www.cashco.com
 email: sales@cashco.com
 Printed in U.S.A. 123-TB

Cashco GmbH
 Handwerkerstrasse 15
 15366 Hoppegarten, Germany
 PH +49 3342 30968 0
 Fax. No. +49 3342 30968 29
 www.cashco.com
 email: germany@cashco.com

Cashco do Brasil, Ltda.
 Al.Venus, 340
 Indaiatuba - Sao Paulo, Brazil
 PH +55 11 99677 7177
 Fax. No.
 www.cashco.com
 email: brazil@cashco.com