
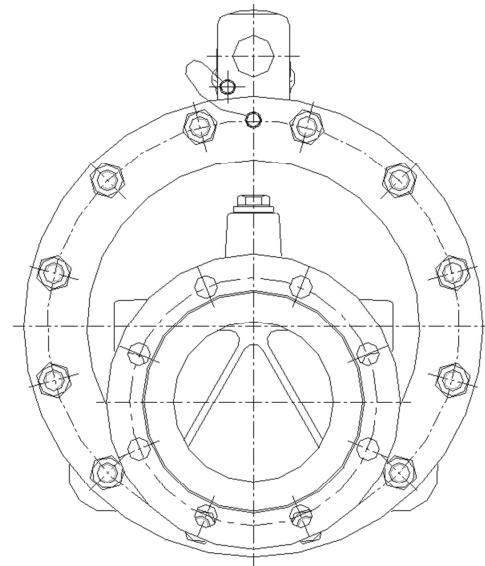
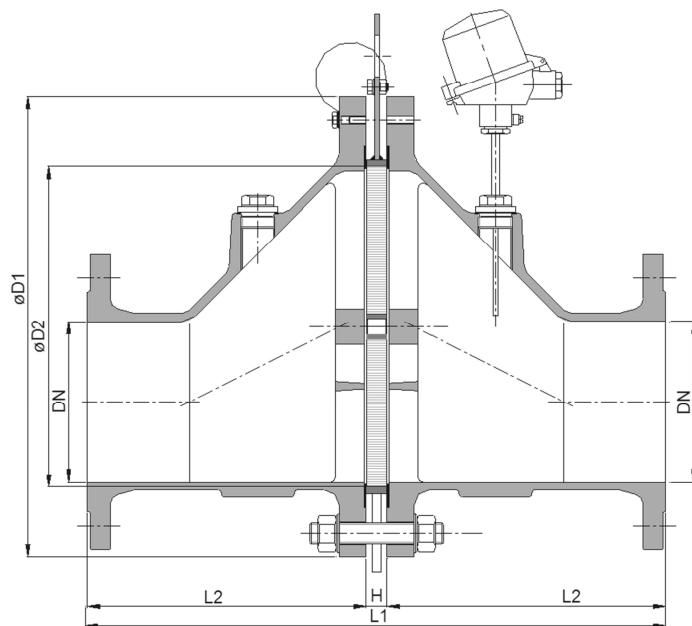


**Bi-directional in-line deflagration flame arrester,
short-time burning proof
KITO® EFA-Def0-I-.../...-1.2
KITO® EFA-Def0-I-.../...-1.2-T (-TT)**



Type examination certificate to EN ISO 16852 and CEx -designation in accordance to ATEX-Guideline 2014/34/EU

| NG | DN | ANSI | D1 | D2 | L1 | H | L2 | kg* |
|-----|-----------|--------|------|-----|------|----|-----|-----|
| 65 | 25 PN 40 | 1" | 155 | 70 | 260 | 20 | 120 | 10 |
| | 32 PN 40 | 1 1/4" | | | | | | 12 |
| 100 | 40 PN 40 | 1 1/2" | 220 | 106 | 310 | 20 | 145 | 22 |
| | 50 PN 16 | 2" | | | | | | 24 |
| 150 | 50 PN 16 | 2" | 285 | 159 | 370 | 20 | 175 | 37 |
| | 65 PN 16 | 2 1/2" | | | | | | 38 |
| | 80 PN 16 | 3" | | | | | | 40 |
| 200 | 80 PN 16 | 3" | 340 | 206 | 420 | 20 | 200 | 55 |
| | 100 PN 16 | 4" | | | | | | 55 |
| 300 | 100 PN 16 | 4" | 445 | 308 | 560 | 20 | 270 | 90 |
| | 125 PN 16 | 5" | | | | | | 93 |
| | 150 PN 16 | 6" | | | | | | 99 |
| 400 | 150 PN 16 | 6" | 565 | 388 | 650 | 20 | 315 | 142 |
| | 200 PN 10 | 8" | | | | | | 161 |
| 500 | 200 PN 10 | 8" | 670 | 485 | 780 | 20 | 380 | 223 |
| | 250 PN 10 | 10" | | | | | | 233 |
| 600 | 250 PN 10 | 10" | 780 | 584 | 920 | 20 | 450 | 313 |
| | 300 PN 10 | 12" | | | | | | 329 |
| 800 | 350 PN 10 | 14" | 1015 | 810 | 1287 | 47 | 620 | |
| | 400 PN 10 | 16" | | | | | | |

Dimensions in mm

* weight refers to the standard design



Design subject to change

performance curves: H 0.33 N

Standard design

| | |
|------------------------------|--|
| housing | : cast steel 1.0619, stainless cast steel 1.4408 |
| gasket | : HD 3822, PTFE |
| KITO® flame arrester element | : completely interchangeable |
| KITO® casing | : steel (galvanized to NG 400), stainless steel mat. no. 1.4571, 1.4581 |
| KITO® grid bolts/nuts | : stainless steel mat. no. 1.4310, 1.4571, : galvanized steel, SS |
| temperature sensor | : PT 100 (option); connection 3/8" |
| flange connection | : EN 1092-1 form B1, ANSI 150 lbs. RF |


Application

For installation into pipes to the protection of vessels and components against deflagration of flammable liquids and gases. Approved for all substances of explosion group IIA1 (old : I) with a maximum experimental safe gap (MESG) ≥ 1.14 mm. Bi-directionally working in pipes, whereby an operating pressure of 1.2 bar abs. and an operating temperature of 60°C must not be exceeded. The distance between a potential ignition source and the flame arrester must not exceed 50 times the inner pipe diameter. The installation of the deflagration flame arrester into horizontal and vertical pipes is permissible. When equipped with one or two temperature sensors, the devices are protected under atmospheric conditions against a short time burning by a burning time $t_{BT} = 1.0$ min. If only one temperature sensor, then it is to be placed on the device side where a burning could be expected.

Example to order :

KITO® EFA-Def0-I-100/40-1.2-T


(design with thermo couple element)



**Bi-directional in-line deflagration flame arrester,
short-time burning proof
KITO® EFA-Def0-I-.../...-1.2
KITO® EFA-Def0-I-.../...-1.2-T (-TT)
H 33 N**

The flow capacity V refers to a density of air with $\rho = 1.29 \text{ kg/m}^3$ at $T = 273 \text{ K}$ and a pressure of $p = 1.013 \text{ mbar}$.
The flow capacity for gases with different densities can be calculated sufficiently accurate by the following approximation equation:

$$V = V_b \cdot \sqrt{\frac{\rho_b}{1.29}} \quad \text{or} \quad V_b = V \cdot \sqrt{\frac{1.29}{\rho_b}}$$

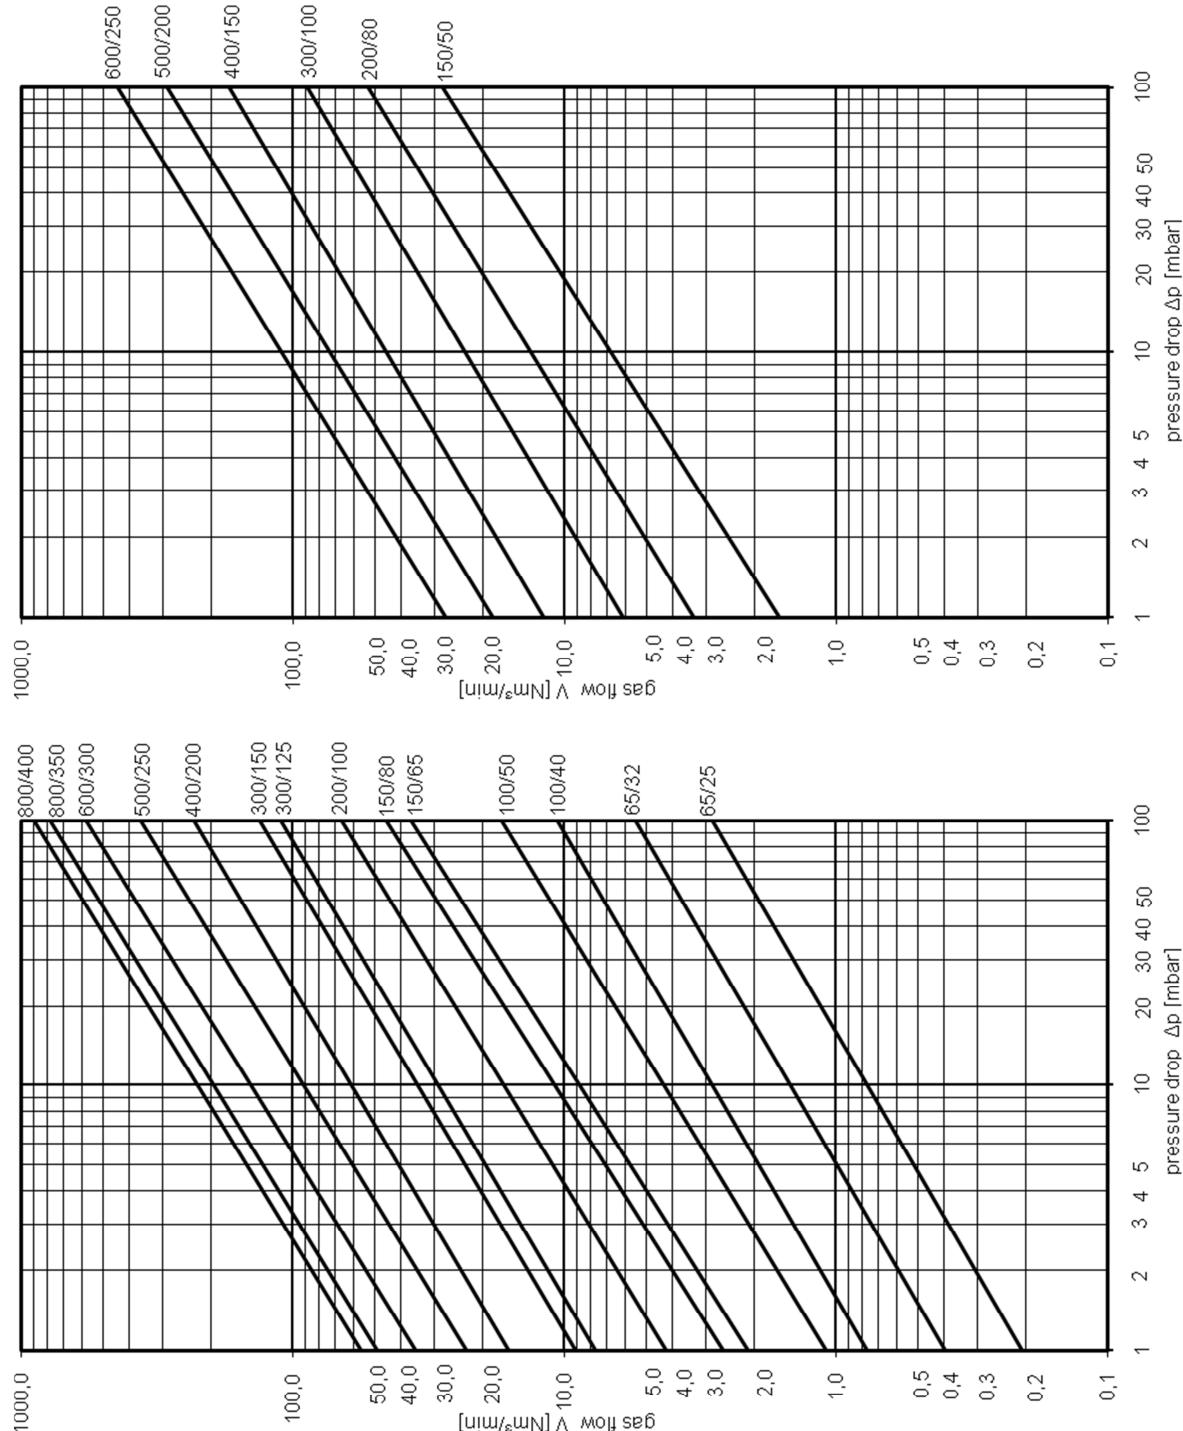

Design subject to change