
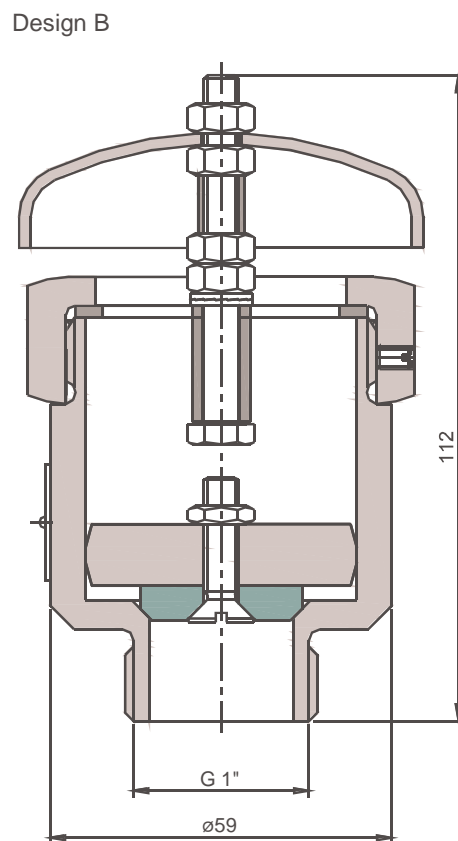


Pressure Relief Valve
KITO® DS/o cont. 25

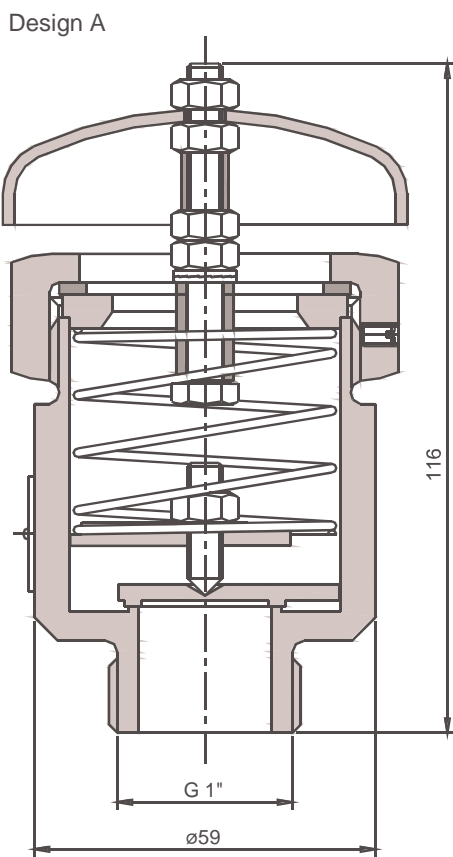

Without EC certificate and **CE**-designation

Weight ~ 1,0 kg.

Dimensions in mm

Design subject to change

Standard design

housing : stainless steel mat. no. 1.4571
 cap : stainless steel mat. no. 1.4301
 threaded connection : G 1"

Design A

valve pallet : stainless steel mat. no. 1.4571
 compression spring : stainless steel mat. no. 1.4571
 set pressure : > 25 - 210 mbar pressure


Design B

valve pallet : stainless steel mat. no. 1.4571
 sealing : PTFE
 set pressure : 10 - 20 mbar pressure

Application

Pressure relief valve for portable tanks for the transport of non-flammable liquids.
 To prevent inadmissible tank pressure by warming or filling.

Not explosion proof.

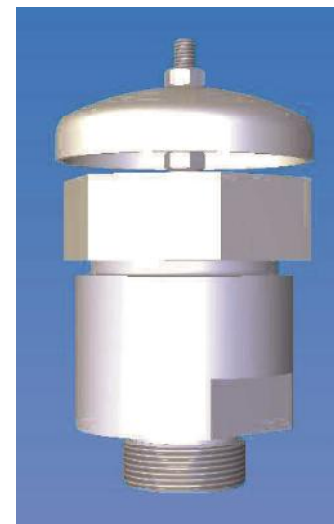

performance curves : M 0.2 N