

Sight Flow Indicator

with PFA or PTFE lining

NORIS

Bauform 880-P
Bauform 972-P

Application:

The indicators have a corrosion-resistant plastic lining and therefore especially suitable for aggressive media.

The sight glasses according to the technical requirements for fittings DIN 3230

Operating conditions:

PFA / PTFE lining: max. -10°C to 180°C

Working pressure: DN 15 to DN 100 PN 16
DN 150 PN 10

Dimensions:

Sight Flow Indicator Bauform 880-P
Dimension DN 15 to DN 150

Sight Flow Indicator Bauform 880-A-P
Dimension ANSI ½" to 8"; ANSI 150 lbs,RF

3-Way-Sight Flow Indicator Bauform 972-P
Dimension DN 25 to DN 80


Materials:

Body	0.7043
Lining	PFA or PTFE
Cover	0.7043
Glass	Borosilicate glass DIN 7080
Screws	A4-70


Ordering example:

Sight Flow Indicator Bauform 880-P
PFA lining
DN 50 PN 16

Sight Flow Indicator Bauform 880-P

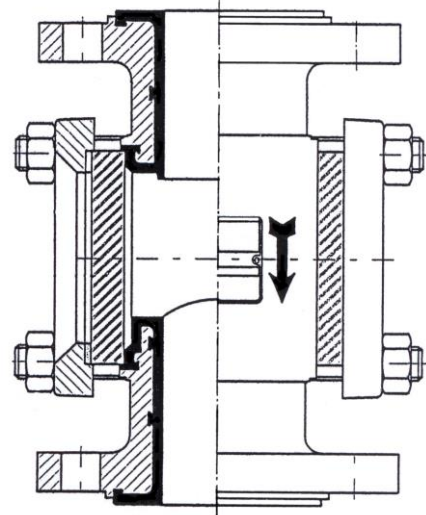

3-Way- Sight Flow Indicator Bauform 972-P

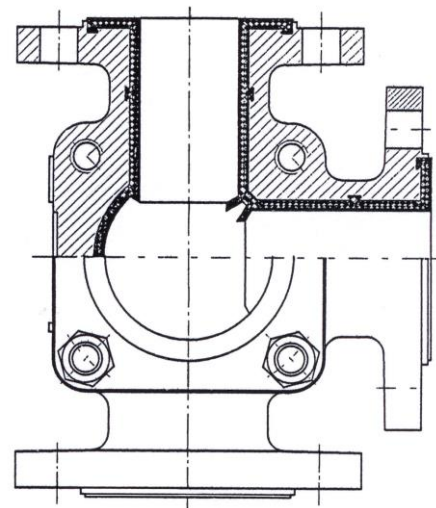

Modification reserved

Säätö

Oy Säätö Ab

Koivupuistontie 26, 01510 Vantaa

Puh 09-759 7850, sales@saato.fi, www.saato.fi