




PREMAFLEX-Pinch Valve
DN 15 – DN 50
Serie PQVI - POM with internal screw thread

Technical data-sheet

Material:

POM (Polyoxymethylene) white
 -Food quality material-

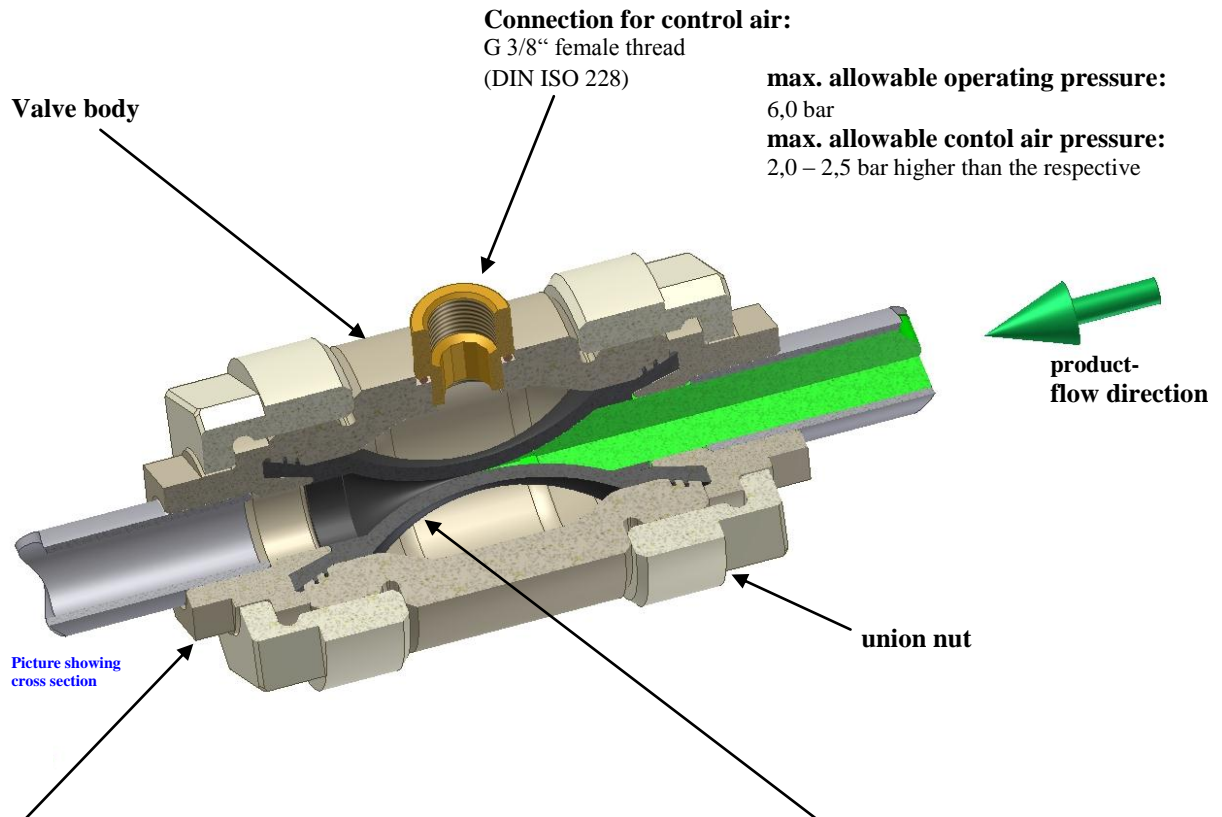

Connection with internal screw thread according DIN ISO 228

- G 1/2"
- G 3/4"
- G 1"
- G 1 1/4"
- G 1 1/2"
- G 2"

Sleeve:

Pure gum rubber*	max.	80°C
Neopren	max.	100°C
EPDM*	max.	120°C**
Viton	max.	100°C
Buna S	max.	100°C
NBR*	max.	100°C
Pure gum rubber „SKAZ“	max.	80°C
Silicon translucent*	max.	150°C**

*above sleeve types are also available in food quality

**Application for POM- Valves with EPDM or Silicon sleeve is only for max 100°C long-time temperature.

Dokument-Nr.:1.018

(Engineering change possible)